

Motor Cycle Tools .....	Page No. 41
Magneto Flywheel Pullers and Holders .....	
Chain Extracting and Installing Tools .....	
Motorcycle Engine and Clutch Tools .....	
Motorcycle Tyre and Wheel Tools.....	
Motorcycle Timing Tools .....	
Motorcycle Wrenches .....	
Motorcycle Stands .....	

### No.CR00A Motorcycle Repair Tool Kit



Part No.	Description
CR001	Crank Case Installer (10x1.25, 12x1.25mm Nuts)
CR002	Drive Chain Breaker (3-22mm) Pin Dia. 3.5-6mm
CR003	Universal Flywheel / Clutch Holding Tool
CR004	Magneto Fly Wheel Puller 28 x 1.0mm (R-Hand)
CR005	Magneto Fly Wheel Puller 27 x 1.0mm (L-Hand)
CR006	Magneto Fly Wheel Puller 24 x 1.0mm (R-Hand)
CR007	Magneto Fly Wheel Puller 16 x 1.5mm (R-Hand)
CR008	Magneto Fly Wheel Puller 14 x 1.5mm (R-Hand)
CR009	Speedometer Front Wheel Gear Nut Socket
CR010	3Pc. Tappet Adjusting Tool (8 & 9mm)
CR011	Clutch Nut Socket (22mm dia. 4 Pins)
CR012	Clutch Nut Socket (23mm dia. 4 Pins)
CR013	Valve Spring Collet Remover / Replacer
CR014	D/Ended Steering Lug Nut Hook Wrench
CR015	Screwdriver with 1/4"Hex Bit Holder
CR016	"T"-Handle with 1/4"Hex Bit Holder
CR017	10mm x 1/4"Hex x 100mm Deep Socket
CR018	8mm x 1/4"Hex x 100mm Deep Socket
CR019	1/2"Sq. Drive x 1/4"Hex Bit Holder
CR020	#2Phillips x 6mm Slotted x100mm 1/4"Hex Bit
CR021	#3Phillips D/End x 100mm 1/4"Hex Bit
CR022	5mm, 6mm Hex D/End x 100mm 1/4"Hex Bit
CR023	4mm, 5mm Hex D/End x 200mm 1/4"Hex Bit
CR024	#2Phillips D/End x 200mm 1/4"Hex Bit
CR025	#3Phillips D/End x 300mm 1/4"Hex Bit

### No.CR0F3 Heavy-Duty Motorcycle Crank Pulley Puller

#### Universal Motorcycle Applications

Heavy duty universal thin jaw puller supplied with all the necessary adaptors, sleeves and extensions for removing crank pulley from the engine's crankshaft for disassembly. Crank pulley puller has universal applications to suit most motorcycle engines. Adjustable bridge head enables jaws to grip on all crank pulleys with diameters 1.1/2"(38mm) to 6.1/4"(160mm). Supplied in blow mold case.

**Puller Reach:** 4.3/4"(120mm)

**Puller Spread:** 1.1/2" - 6.1/4" (38 - 160mm)



### No.CR0J6 Motorcycle Chain Link Extracting & Installing Tool

#### Universal application for use on most motorcycle drive chains

Set contains all the tooling required for cutting and disassembly of press fitted connecting links. Also for rivetting of the connecting pins and press fitting of the connecting pin plate. Full instructions are included.

#### Set includes the following:

CROJ6-3MPIN	3mm Forcing Pin	CROJ6-GUIDE1	Silver Guide
CROJ6-4MPIN	4mm Forcing Pin	CROJ6-GUIDE2	Grey Guide
CROJ6-5MPIN	5mm Forcing Pin	CROJ6-INST	Installer Base
CROJ6-EXT08	1/4" Extractor Guide		
CROJ6-EXT16	1/2" Extractor Guide		
CROJ6-EXT20	5/8" Extractor Guide		
CROJ-BODY	2Pc. Body		





## No.CR001 Motorcycle Crank Case Installing Tool

For use with #CR301 Crank Case Separator.  
Supplied with 10 x 1.25 and 12 x 1.25  
connecting nuts.  
Suits all sizes.



## No.CR002 Motorcycle Drive Chain Breaker *Universal application*

Use to remove and assemble chain  
connecting links, rivet pins and connecting  
link plates on most motorcycle drive chains  
etc.

**Pin Diameter:** 3.5mm to 6mm  
**Capacity:** 3mm to 22mm



## No.CR003 Motorcycle Universal Flywheel Holding Tool

This tool holds the flywheel, clutch and pulley  
assembly to prevent it from rotating while  
using the flywheel pulley puller.

**Opening Capacity:** 40mm to 150mm dia  
**Pin Size Diameters:** 5.5mm & 9mm



## No.CR004 Magneto Flywheel Puller

Screw into flywheel, then apply force with  
centre screw to remove from tapered shaft.  
**Size:** 28x1.0mm Female Right Hand Thread



## No.CR005 Magneto FlyWheel Puller

Screw into flywheel, then apply force with  
centre screw to remove from tapered shaft.  
**Size:** 27x1.0mm Male Left Hand Thread



## No.CR006 Magneto Flywheel Puller

Screw into flywheel, then apply force with  
centre screw to remove from tapered shaft.  
**Size:** 24x1.0mm Male Right Hand Thread



## No.CR007 Magneto Flywheel Puller Adaptor

Screw into flywheel, then attach slide hammer  
to impact flywheel from tapered pulley shaft.  
**Size:** 16x1.5mm Male Right Hand Thread.  
5/8" UNC female thread to suit slide hammer.



## No.CR008 Magneto Flywheel Puller Adaptor

Screw into flywheel, then attach slide hammer  
to impact flywheel from tapered pulley shaft.  
**Size:** 14x1.5mm Male Right Hand Thread.  
5/8" UNC female thread to suit slide hammer.



## No.CR009 Motorcycle Speedometer Gear Nut Socket

Speedometer front wheel gear nut socket  
for use on the front wheel of Yamaha  
motorcycles from 50cc upwards.








### No.CR010

#### 3Pc. Motorcycle Tappet Adjusting Tool Set

Adjusting tool has 1/8" square female drive to fit tappet adjusting screws. Supplied with 8mm and 9mm lock nut sockets to fit Yamaha and Honda respectively.



### No.CR011

#### Motorcycle Four Lug Clutch Nut Socket

Fits the castellated nut found on Honda clutches. Models: 50cc, 70cc, 80cc, 90cc, 100cc, 125cc, etc.  
**Pitch Circle Diameter:** 22mm



### No.CR012

#### Motorcycle Four Lug Clutch Nut Socket

Fits the castellated nut found on Honda clutches. Models: 135cc, 150cc, moto-cross and off road motorcycles.  
**Pitch Circle Diameter:** 23mm



### No.CR013

#### Motorcycle Valve Spring Collet Remover / Replacer

Use to remove split collets when compressing valve springs on four stroke engines. Holds valve spring collets in position for replacement. Universal on most four stroke engines.



### No.CR014

#### Motorcycle Double Ended Steering Lug Nut Hook Wrench

Double ended hook wrench for use on castellated lug nuts on steering neck assemblies.  
**Length:** 10.5/8"(270mm)



### No.CR015

#### Motorcycle 1/4" Hex Bit Screwdriver

170mm Screwdriver handle with positive locking 1/4"Hex female bit holder. Supplied with one double ended #2 Phillips bit 65mm long and one double ended #2 & #3 Phillips bit 75mm long. Can be used with all the different Phillips, Slotted, In-Hex, 1/4" hex bits and hollow nut drivers listed with motorcycle tools.  
**Shaft Length:** 55mm  
**Overall Length:** 170mm



### No.CR016

#### Motorcycle 1/4" Hex T-Handle Bit Holder

185mm T-handle with positive locking 1/4"Hex female bit holder. Can be used with all the different Phillips, slotted and hexagon bits listed with motorcycle tools.  
**Shaft Length:** 175mm  
**Overall Length:** 185mm



#### Impact Quality Hollow Nut Driver Sockets for use with Screwdriver, T-Handle & 1/2" Drive Socket Bit Holder


Part No	Description	Length
CR018	8mm Dp.Impact Nut Driver	100mm
CR026	9mm Dp.Impact Nut Driver	100mm
CR017	10mm Dp.Impact Nut Driver	100mm
CR027	11mm Dp.Impact Nut Driver	100mm
CR028	12mm Dp.Impact Nut Driver	100mm
CR029	13mm Dp.Impact Nut Driver	100mm
CR030	14mm Dp.Impact Nut Driver	100mm




### No.CR019

#### Motorcycle 1/4" Hex 1/2" Drive Bit Holder

1/2" Square Drive with positive locking 1/4"Hex female bit holder. Can be used with all the different Phillips, slotted and hexagon bits listed with motorcycle tools.  
**Head Diameter:** 11mm  
**Overall Length:** 50mm

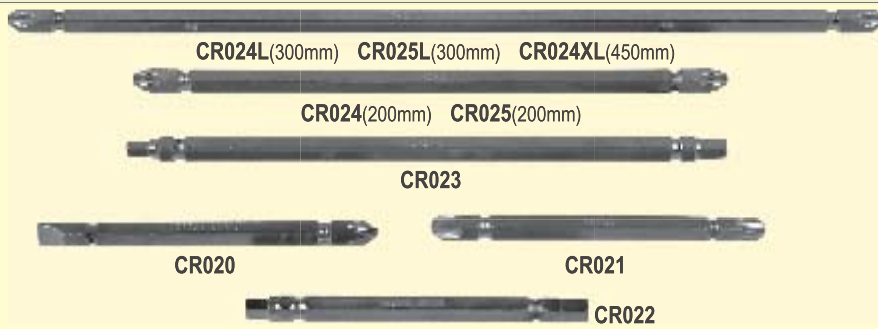

All collets have 1/2"UNC internal threads

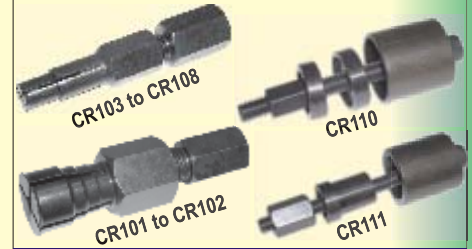


## Blind Hole Bearing Puller Attachments

Part No.	Description	Length
CR101	30-32mm Collet w/ Pin	98mm
CR102	25-28mm Collet w/ Pin	98mm
CR103	20-23mm Collet w/ Pin	98mm
CR104	17-19mm Collet w/ Pin	98mm
CR105	15-17mm Collet w/ Pin	98mm
CR106	12-14mm Collet w/ Pin	98mm
CR107	10-12mm Collet w/ Pin	98mm
CR108	8-10mm Collet w/ Pin	98mm
CR109	1.34kg Sliding Hammer	385mm
CR110	28-30mm Bearing Installing Tool	
CR111	17-20mm Bearing Installing Tool	

## Doubled Ended Slotted, Phillips and Hex-Bits to suit CR015, CR016 & CR019

Part No.	Description
CR020	#2Phillips x 6mm Slotted 1/4"Hex Bit 100mm Long
CR021	#3Phillips Doubled-Ended 1/4"Hex Bit 100mm Long
CR022	5mm & 6mm Hex Doubled-Ended 1/4"Hex Bit 100mm Long
CR023	4mm & 5mm Hex Doubled-Ended 1/4"Hex Bit 200mm Long
CR024	#2Phillips Doubled-Ended 1/4"Hex Bit 200mm Long
CR024L	#2Phillips Doubled-Ended 1/4"Hex Bit 300mm Long
CR024XL	#2Phillips Doubled-Ended 1/4"Hex Bit 450mm Long
CR025	#3Phillips Doubled-Ended 1/4"Hex Bit 200mm Long
CR025L	#3Phillips Doubled-Ended 1/4"Hex Bit 300mm Long

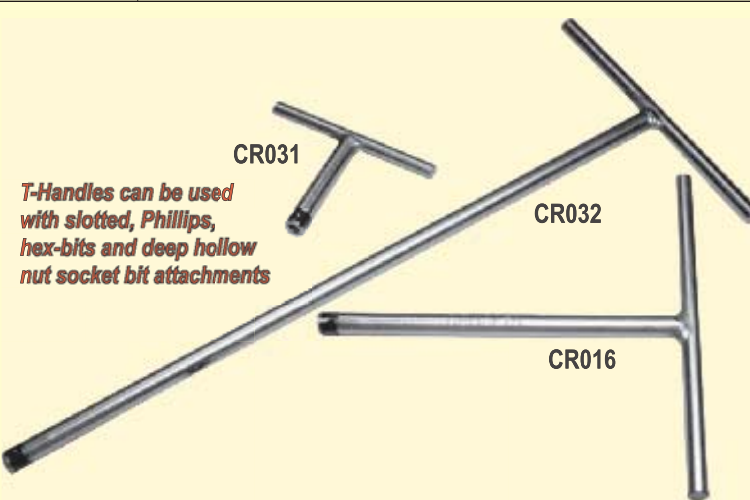

## T-Handles for D/Ended Slotted, Phillips, Hex-Bits & Dp. Nut Drivers

Part No.	Description
CR016	1/4"Hex Drive T-Handle Wrench 185mm Long with positive bit retainer
CR031	1/4"Hex Drive T-Handle Wrench 55 mm Long with positive bit retainer
CR032	1/4"Hex Drive T-Handle Wrench 365mm Long with positive bit retainer




## No. CR034 14mm Motorcycle Brake Tension Adjusting Tool

This 14mm deep long reach T-handle socket wrench is used for adjusting the brake spring tension on motorcycle drum brakes. Has universal applications on all makes of motorcycles.

**Opening:** 14mm Deep 6 Point Socket

**Overall Length:** 15.3/4"(400mm)


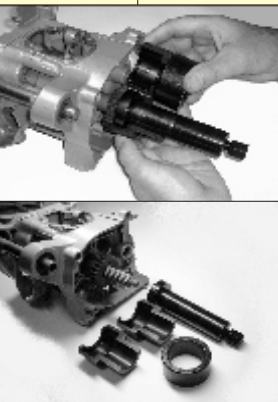


## No. CR201

### Motorcycle Engine Kick Starter Gear Tool Set

Set comprises of:

- (A) Split collet puller for removing starter gear on Honda 125cc and up
- (B) Hook tool for adjusting the spring on the inside of the kick start when assembling the starter. (Universal application)
- (C) 38mm 4 Lug lock nut wrench (1/2"Drive) for starter gear lock nut on Honda 125cc and up.

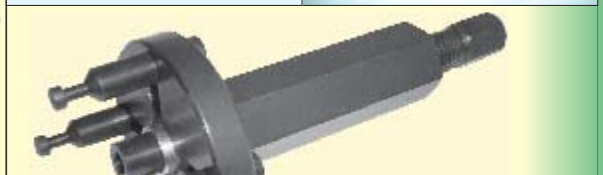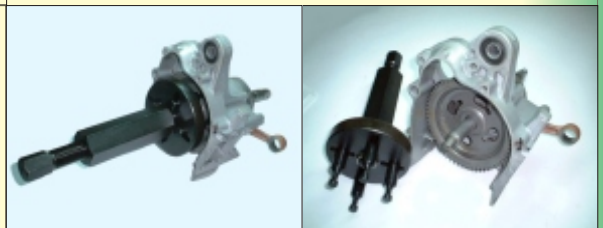

## No. CR202 Motorcycle Engine Starter Gear Flywheel Puller

Four adjustable lock pins, lock into slots on the flywheel for removal from the crankshaft. Suits Honda etc. motorcycle engines. Pins are adjustable from 45mm to 90mm diameter.








### No.CR203 Motorcycle Steering Adjustment Lock Nut Socket Set

**Set comprises of:**

- (A) 46mm 6 Point extra deep hole thru socket. **Hex Drive:** 32mm **Length:** 155mm
  - (B) 3 Lug 45mm circle diameter 110mm deep socket. **Hex Drive:** 19mm **Length:** 165mm
  - (C) 32mm 6 Point 110mm deep socket. **Hex Drive:** 19mm **Length:** 165mm
- Sockets are used for steering adjustment locknuts on Honda motorcycles.

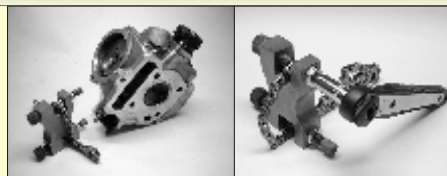

*Operating instructions  
included*

### No.CR204 Engine Timing Gear Chain Link Remover & Replacer

Use solid straight pin for removal and use the spring loaded taper pin for installing the new link together. Includes 1/4" Dr. Ratchet. Suits 4.7mm motorcycle timing chain.



### No.CR205 Motorcycle Engine Starter Flywheel Puller

Special puller 110mm long with 24mm x 1.00 pitch diameter female thread. For pulling the starter flywheel from the engine crankshaft. Puller has 50mm deep opening.

**Suits:** Honda, SYM, Kymco.



### No.CR206 Motorcycle Engine Starter Flywheel Locknut Socket

1/2" Drive socket 120mm long with 32mm 6 point opening. For removing & replacing the starter flywheel locknut from the engine crankshaft. Socket has 105mm deep opening.

**Suits:** Honda, SYM, Kymco.



### No.CR207 Motorcycle Steering Adjustment Lock Nut Socket

1/2" Drive 6 lug socket 120mm long with 42mm circle diameter. For adjusting the steering locknut on Yamaha and other makes of motorcycles. Socket has 94mm deep opening.



### No.CR208 Motorcycle Steering Adjustment Lock Nut Socket

1/2" Drive 4 lug socket 80mm long with 51mm circle diameter. For adjusting the steering locknut on Honda and other makes of motorcycles. Socket has 60mm deep opening.



**Suits Honda**

### No.CR209

**Motorcycle Clutch Nut Socket**  
1/2" Drive 39mm 6 point socket 44mm long. For removing and replacing the clutch locknut on Honda motorcycles.



**Suits Yamaha**

### No.CR210

**Motorcycle Clutch Nut Socket**  
1/2" Drive 41mm 6 point socket 44mm long. For removing and replacing the clutch locknut on Yamaha motorcycles.





*Suits Yamaha*



**No. CR211**

## Motorcycle Clutch Nut Socket

1/2" Drive 46mm 6 point socket 47mm long. For removing and replacing the clutch locknut on Yamaha motorcycles.



**No. CR212**  
**Motorcycle**  
**Clutch Nut Wrench**

39mm 6 Point opening wrench 290mm long with 3/8" square drive to enable torque setting when refitting. Use wrench handle with hammer for impact action to remove the clutch nut. Used on small Honda motorcycle engines.

**Suits:** Honda 50cc to 150cc engines



**No. CR213**

## Crank Bearing Puller Set

*Universal application for all motorcycles*  
*Super thin bearing separator*

**Between Bolts:** 84mm, **Max Opening:** 84mm  
**Cross block push puller:**  
**Head:** 140mm, **Extension Rods:** 120mm

*Three openings*  
*at each end!*




**No. CR214**  
**Universal Motorcycle**  
**Spoke Wrench**

*For Spoke Wheels*

Double ended wrench has six size openings for fitting and adjusting nipples to tension spoke wheels as needed for wheel rim alignment on motorcycle wheels.

**Opening Sizes:**

1 = 6.5mm / 2 = 6.0mm  
3 = 5.5mm / 4 = 5.2mm  
5 = 5.0mm / 6 = 4.0mm



**No. CR215**  
**Motorcycle**  
**Disc Brake Spreader**

*Universal Motorcycle Application*

Compresses the brake pistons on most style calipers for easy pad replacement. Suits all front and some rear disc brakes.  
**Capacity:** 1/2"(13mm) 2.1/4"(58mm)



*Maximum opening of 225mm*

**No. CR216**

## Universal Tyre "Bead Breaker"

*Universal application for all motorcycle tyres*

Extra long handles with specially shaped jaws gives the power to easily crush the tyre to break the bead seal.

Made from strong 20mm tubular steel.

**Maximum Opening:** 225mm

**Length:** 700mm




**No. CR217-8**  
**Motorcycle Tubeless Tyre**  
**Repair Tool Kit**

*For Repair Of Tubeless Tyres*

Use the reaming tool to enlarged the punctured hole. Insert the repair compound with T-handle open eye insertion tool into the reamed hole. Excess compound is then trimmed, flush with the tread.


**Set Contains:**

**No. CR217** Tyre Repair Insert Tool  
**No. CR218** Tyre Repair Reaming Tool  
**No. 6053** Repair Compound Plugs (5)



**No. CR219**  
**Motorcycle Adjustable**  
**Flywheel Pulley Holder**

Fit holder over flywheel pulley then tighten handle to hold into position. Unit has three adjustment holes to cover all diameters for motorcycle pulleys. **Capacity:** 85mm-135mm

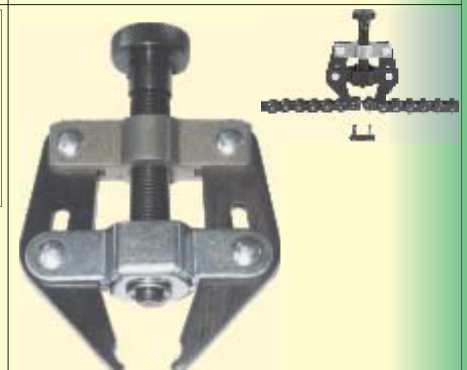

**No. 9614**

## Universal Chain Tensioner

Specially shaped narrow jaws are designed to fit in between chain links to enable the chain link to be removed or replaced.

**Suits Chain Sizes:** 428, 525, 528 & 530

**Max Opening:** 1.1/4"(32mm)

**Min Open:** 9/16"(14mm)

**Length:** 4.1/2"(115mm)







**No.CR220**

### Motorcycle Universal Crank Pulley Puller

*Universal application for all motorcycles*

Heavy-duty puller with fine jaws to reach behind the crank pulley for removal from the engine crankshaft.

Suits: Honda, Suzuki, Yamaha etc.

**1 Set of fine jaws:** 65mm reach 30mm width

**1 Set of fine jaws:** 88mm reach 30mm width

**2 Cross blocks:** 140mm & 225mm in length

**3 Forcing screw caps:** 19mm, 30mm & 55mm in length



### No.CR301 Motorcycle Crank Case Separator Tool

*Universal application for all motorcycles*

Jaws rotate 360° around the centre block to locate on stud holes. Long elongated slots enable puller to work on 110mm to 270mm circle diameters.

**Capacity:** 4.3/8" to 10.5/8"(110 to 270mm)



### Motorcycle Tyre Levers

Chrome plated chrome vanadium motorcycle tyre levers. One end features a wide spoon edge, with the other end having a 6 point ring wrench for stud removal.

#### No.CR303 Motorcycle Tyre Lever

**Single Hex Opening:** 17mm

**Overall Length:** 9.1/2"(240mm)

#### No.CR304 Motorcycle Tyre Lever

**Single Hex Opening:** 15mm

**Overall Length:** 9.1/2"(240mm)



**No.6922**

### Motorcycle Tyre Lever

Chrome plated chrome vanadium motorcycle tyre lever. One end features a wide spoon edge, while the other end features a comfort grip cellulite handle. Drop forged and heat treated alloy steel.

**Width:** 1" (25mm)

**Length:** 11"(280mm)




**No.6921**

### Motorcycle Rim Protector

Pair of tough nylon covers can be fitted to protect chrome plated rim surfaces when using tyre levers to remove the tyre from the rim. Supplied with nylon restraining cord to hold rim protectors in place.

**Overall Length:** 150mm

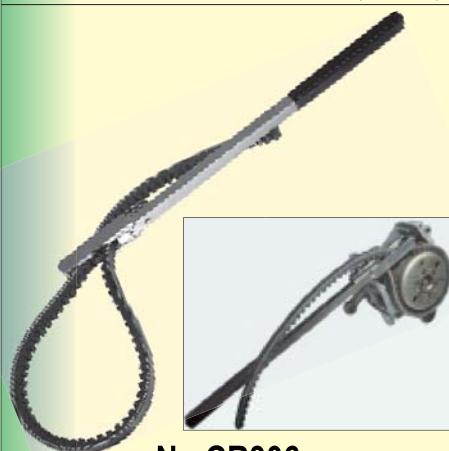

**No.CR306**

### Notched V-Belt Pulley Holder

Adjustable notched V-belt securely holds pulley from rotating whilst undoing fasteners.

**Maximum Capacity:** 8.1/2"(215mm)

**Handle Length:** 18"(450mm)

**V-Belt Length:** 29.1/2"(750mm)



### Motorcycle Gudgeon Pin Removers & Replacers

Piston pin adaptor has machined opening for the correct removal & replacement of gudgeon pins with specific outside and inside diameters.

#### No.CR307 Motorcycle Gudgeon Pin Remover & Replacer

15mm outside dia. 10mm inside dia.

#### No.CR308 Motorcycle Gudgeon Pin Remover & Replacer

13mm outside dia. 8mm inside dia.



**No.CR309**

### Motorcycle Gudgeon Pin Remover & Replacer

Universal tool supplied with piston pin adaptors to suit the following piston pin sizes: 13mm, 15mm, 16mm, 19mm & 22mm. For correct removal & replacement of gudgeon pins.






**No.4989**  
**Motorcycle Magneto  
Flywheel Puller**

Six sizes to fit most motorcycle magneto flywheel threads. Use with a soft face hammer for quick removal from tapered shaft.

**Sizes:** 10 x 1.25mm    14 x 1.5mm  
16 x 1.5mm    18 x 1.5mm  
24 x 1.0mm    27 x 1.0mm



**No.4985**  
**Motorcycle Pulley Holder**

Fit pulley holder over flywheel then tighten handle to hold flywheel, has two extra adjusting holes to reduce the diameter for small pulleys. **Capacity:** 85 to 135mm



**No.CRG15**  
**Motorcycle Flywheel Puller**  
*Universal application for motorcycles*

Heavy-duty three slot pulling plate with short forcing screw and bolts to fit Yamaha and Suzuki engine flywheels.

**Pulling Plate Diameter:** 110mm

**Centre Bolt:** 90mm long

**Three Pulling Studs:** 100mm long



**No.CR305**  
**#2 Phillips Screwdriver**

Hardened tip #2 Phillips screwdriver 120mm long blade fitted with impact resistant acetate handle. Suitable for motorcycle Phillips head fasteners.

**Blade Length:** 120mm

**Overall Length:** 235mm



**No.6452-1**  
**Motorcycle Timing Tool  
without Gauge**

Use with a compact gauge, reads timing without removing fuel tank. Designed for the cramped quarters on many motor cycles. 14mm Adaptor has locking collar for adjusting indicator.

Complete with two contacts.

**Contact Diameters:** 3/16"(5mm)

**Contact Lengths:** 1.1/2"(38mm) & 3"(75mm)



*Includes Gauge*

**No.6452**  
**Motorcycle Timing Tool**

Compact gauge, reads timing without removing fuel tank. Designed for the cramped quarters on many motor cycles.

14mm Adaptor has locking collar for adjusting indicator.

Complete with two contacts.

**Contact Diameters:** 3/16"(5mm)

**Contact Lengths:** 1.1/2"(38mm) & 2"(50mm)

**Gauge Diameter:** 1.5/8"(41mm)



**No.CR0J2 Slide Hammer Puller Set for Motorcycle Steering Bearing Cup Removal & Replacement**

Universal application on all steering drive assemblies as shown in usage pictures above. 3lb Slide hammer supplied with special step bushes to cover the following bearing diameters for removal and replacement.

**Step Bush Adaptor Sizes:** 26mm, 28mm, 30mm & 30.5mm





### No.4124

#### Motor Cycle Valve Lifter

Special design for motor cycle overhead cam engines. Compact, rugged, powerful & is simple and fast to use. 3 Recessed valve adaptors included. 19, 23 & 25mm.

**Maximum Opening:** 5.1/2"(140mm)

**Maximum Depth:** 4"(100mm)



### No.4128

#### Heavy-Duty Car & Motorcycle Valve Lifter

**Suitable for overhead cam engines**

Five valve adaptors enable use in restricted & confined spaces with clearance to easily remove valve collets.

Adaptor sizes: 16, 19, 23, 25 & 30mm

Forged body for extra strength.

**Capacity Depth:** 220mm / **Throat:** 120mm




### No.4426 Motor Cycle Compression Gauge

Snap tester on to handle bars for "Hands Free" use. Includes 10mm, 12mm, 14mm, 18mm, and 14mm long reach screw in adaptors to fit all bikes. Extra long 16"(405mm) hose allows gauge to reach handle bars. Great for use on most small engines. Instructions included.

**Dual Gauge Readings:** 0 to 300psi (0 to 21bar)

**Gauge Diameter:** 2.1/2"(65mm)

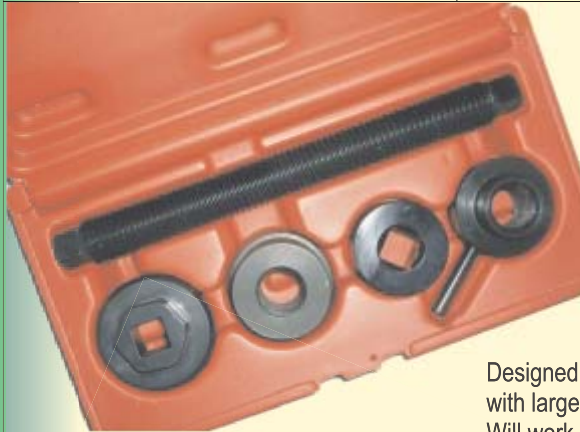

### No.HD020 Fork Spring Compressor Kit for Harley-Davidson

**Adaptor sizes:**

HD020-5 Forcing Screw

HD020-1 39mm Adapter

HD020-2 39mm Socket

HD020-3 41mm Adapter

HD020-4 41mm Socket

Designed to install fork caps on forks with large amount of spring pre-load. Will work on most 39mm and 41mm Harley-Davidson fork applications.




### No.C7016

#### Motor Cycle Pulley Holder

This tool features 90° offset jaws that locking to the flywheel and clutch assembly to prevent it rotating whilst servicing the motor. Adjustable lock screw enables adjustment to all diameters.

**Capacity:** 1/2" to 9" (13mm to 225mm)

**Length:** 13" (330mm)

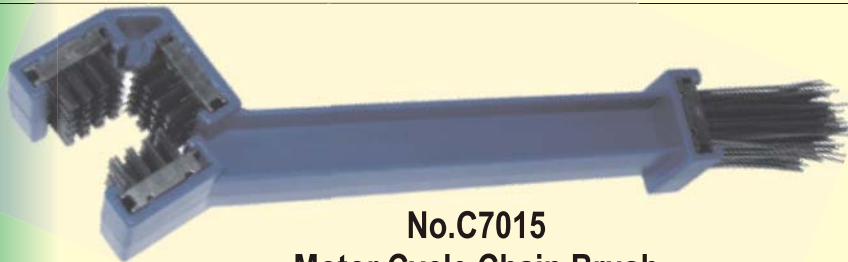

### No.C7015

#### Motor Cycle Chain Brush

Tough four row nylon bristles work on three sides to clean motorcycle drive changes. On the other end is 65mm long bristles for cleaning inside the chain.

Handle is made from tough PE material.

**Length:** 10.1/4"(263mm)



### No.ML001

#### Motorcycle Work Platform Lift

All steel construction with heavy-duty hydraulic ram. Drop leaf platform and front wheel support clamp to assist in removal of rear wheel.

Support platform fitted with a full width loading ramp.

Supplied with separate, foot operated air/hydraulic pump.

Capacity	Min Height	Max Height
500kg	160mm	785mm

Width	Length
700mm	2730mm





## C7008

### Hole Through Bearing Remover Set

Place split spigot into bearing hole when select the correct size taper punch and drive into the split spigot to expand it to firmly grip the bearing. Bearing can then be driven from the hosing.

Set contains seven spigots and two taper punches to expand the spigots.

**Spigot sizes:** 10mm, 12mm, 15mm, 17mm, 19mm, 20mm, 25mm

**Punch sizes:** 10mm x 250mm, 15mm x 400mm



## No.C7013

### 10Pc. Motor Cycle Flywheel Drive Pullers

Complete set of magneto flywheel pullers. Screw into flywheel, then apply force with centre screw to remove the flywheel from the tapered shaft. Fifteen sizes supplied in blow mold case. All available separately as listed in table above.

#### Individual sizes

#### Available Separately

Part No.	Size	Length
<b>C1415</b>	14mm x 1.5 Pitch (RH)	85mm
<b>C1615</b>	16mm x 1.5 Pitch (RH)	85mm
<b>C1815</b>	18mm x 1.5 Pitch (RH)	65mm
<b>C1910</b>	19mm x 1.0 Pitch (RH)	85mm
<b>C2015</b>	20mm x 1.0 Pitch (RH)	65mm
<b>2 Sizes</b>	27mm x 1.25 Pitch (RH)	
<b>C2215</b>	22mm x 1.5 Pitch (RH)	65mm
<b>2 Sizes</b>	26mm x 1.5 Pitch (RH)	
<b>C2815</b>	28mm x 1.5 Pitch (RH)	65mm
<b>C2610</b>	26mm x 1.0 Pitch (RH)	65mm
<b>2 Sizes</b>	28mm x 1.0 Pitch (RH)	
<b>C2210</b>	22mm x 1.0 Pitch (RH)	65mm
<b>2 Sizes</b>	25mm x 1.5 Pitch (RH)	
<b>C2410</b>	24mm x 1.0 Pitch (RH)	65mm
<b>2 Sizes</b>	27mm x 1.0 Pitch (LH)	



## No.C7017

### Motor Cycle T Lock Wrench

Double sided T lock wrench for use on locking the pulley nuts on motor cycle engine pulleys.

**Sizes:** 14mm & 17mm

**Length:** 5.1/2" (140mm)



## No.C7018

### Motor Cycle Clutch Outer Nut Holder

Special four slotted wrench to fit over the lugs on the clutch outer nut on motor cycle clutches.

**Lug Diameter:** 58mm

**Length:** 11"(280mm)



## No.C7019

### Motor Cycle Clutch Outer Holder

Special four lug pin wrench to fit into the slots on the clutch outer nut on motor cycle clutches for holding clutch in position whilst servicing engine components.

**Lug Diameter:** 58mm

**Length:** 11"(280mm)



## No.C7020

### Motor Cycle Rotor Pulley Puller

Special designed puller for removing and replacing the rotate pulley fitted to motor cycle engines.

**Length:** 9.1/4" (235mm)





**No.C7021**  
**Motor Cycle Pulley Lock Nut Wrench 12 Point**

Special 12 point socket wrench to suite pulleys fitted to motor cycle engines.  
**Opening Size:**  
**Length:** 11"(280mm)



**No.C7022**  
**Motor Cycle Pulley Lock Nut Wrench 6 Point**

Special 6 point socket wrench to suite pulleys fitted to motor cycle engines.  
**Opening Size:**  
**Length:** 11"(280mm)



**No.C7023**  
**Motor Cycle Lock Nut Wrench**

Special shaped three lug lock nut wrench pin wrench for use on lock nuts fitted to motor cycle engine.  
**Lug External Diameter:** 51mm  
**Lug Size:** 24mm and 9mm  
**Length:** 9.1/2" (240mm)



**No.C7024**  
**Motor Cycle Lock Nut Wrench**

Four pin wrench for use on lock nuts fitted to motor cycle engine.  
**Pin External Diameter:** 45mm  
**Pin Size:** 4mm Square  
**Length:** 9.1/4" (235mm)



**No.C7025**  
**Motor Cycle Locking Tool**

Special bolt on locking tool to lock the flywheel and timing gear when servicing motor cycle engines component.  
**Length:** 4.3/4" (121mm)



**No.C7026**  
**Motor Cycle Clutch Wrench**

Special 34mm 6 point socket wrench fitted with two pins for servicing clutches on motor cycle engines.  
**Opening Sizes:** 34mm **with two pins**  
**Length:** 6.1/2" (165mm)



**No.C7027**  
**39mm Motor Cycle Clutch Wrench**

Special 39mm 6 point socket wrench fitted with two pins for servicing clutches on motor cycle engines.  
**Opening Sizes:** 39mm **with two pins**  
**Length:** 6.1/2" (165mm)



**No.C7028**  
**41mm Motor Cycle Clutch Wrench**

Special 41mm 6 point socket wrench fitted with two pins for servicing clutches on motor cycle engines.  
**Opening Sizes:** 41mm **with two pins**  
**Length:** 6.1/2" (165mm)



**Motor Cycle Clutch Wrench**

Special 6 point socket wrench fitted with two pins for servicing clutches on motor cycle engines.

**No. C7029 Motor Cycle Clutch Wrench**  
**Sizes:** 39mm **Length:** 7.1/4" (184mm)

**No. C7030 Motor Cycle Clutch Wrench**  
**Sizes:** 46mm **Length:** 7.1/4" (184mm)





**No.C7031**  
**46mm Motor Cycle**  
**Clutch Wrench**

Special 46mm 6 point socket wrench fitted with three pins for servicing clutches on motor cycle engines.

**Opening Sizes:** 46mm with three pins  
**Length:** 9.1/4" (235mm)



**No.C7032**  
**Motor Cycle Carburetor Gauge**

This gauge is use to set and obtain the exact measurements for float level and pump rod travel on carburetors fitted to motor cycle engines.

**Length:** 4.1/2" (115mm)



**No.C7035**  
**5 Size Motor Cycle Wrench**

Special shaped combination 6 point, 12 point socket wrenches with built in "C" wrench.

This wrench has mutable uses on motor cycles including use for spark plugs.

**Sizes:** 17mm, 21mm, 27mm, 32mm plus "C" hook wrench for use on castellated lug nuts.

**No.C0779**  
**Special Punch for Motorcyle**  
**Wheel Bearings**

**Hung Yu Sample**



**No.C7033**  
**Sprocket Bush Extracting Tool**

Miniature expanding collet puller for extracting sprocket bushes fitted to motorcycles.

Serrated jaws expand inside the sprocket bush with the 5mm diameter forcing screw used to extract the sprocket bush.

**Puller Head diameter:** 9 to 10mm

**Puller Length:** 58mm

**No.CR310**  
**Motor Cycle Spindle Tool**  
**19,22,24mm**

**Yu Feng**



**No.C7034**  
**Chain Breaker & Riveting Tool Set**

**Universal application for use on motorcycle drive chains**

Set contains all the tooling required for cutting and disassembly of press fitted connecting links.

Also for rivetting of the connecting pins and press fitting of the connecting pin plate.

Full instructions are included.

**Set includes the following:**

3mm, 4mm, 5mm **Forcing Pins**

3 x Receiver sockets to suit forcing pins

2 x Installing guides

1 x Installing plate

1 x 2 Pc. Extracting tool



**C7215A**  
**Large Motor Cycle**  
**Service Stand**



**C7215B**  
**Small Motor Cycle**  
**Service Stand**



**No.HD021**  
**39mm Fork Spring**  
**Compressor Kit for Harley-Davidson**

Designed to install fork caps on forks with large amount of spring pre-load. Will work on most 39mm Harley-Davidson fork applications.

- \* FT-020-5 Jackscrew
- \* FT-020-1 39mm Adapter
- \* FT-020-2 39mm Socket



**No.HD022**  
**41mm Fork Spring**  
**Compressor Kit for Harley-Davidson**

Designed to install fork caps on forks with large amount of spring pre-load. Will work on most 41mm Harley-Davidson fork applications.

- \* FT-020-5 Jackscrew
- \* FT-020-3 41mm Adapter
- \* FT-020-4 41mm Socket